


SURVIVOR® ATV-M

Self-Contained Levertronic Truck Scale — Steel Deck



**HEAVY
DUTY**

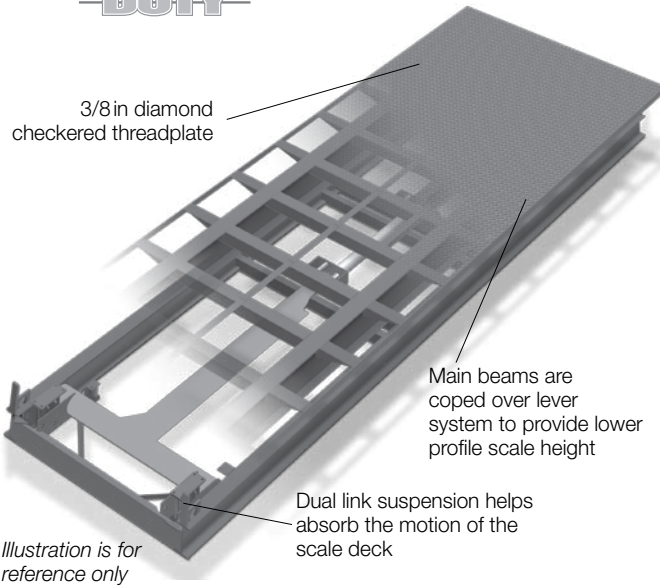

STANDARD FEATURES

Now Includes:
**5 Year Parts & Lightning
Protection Warranty**

- Above ground or in-pit foundation
- Temporary or permanent installations
- Factory-assembled, self-contained modules
- Individual module lengths from 10ft to 40ft
- Multiple modules create desired scale length
- Standard levers - 32.5 ton sectional rating
- Standard height - 30in
- NTEP Certified, CC #05-018
- Standard deck - 3/8in thick diamond safety treadplate
- Standard widths from 10ft to 14ft
- Capacities to 400,000lb

Scale Options

Side pipe rails, steel bulkheads, conversion S-beam load cell(s), load cell mounting hardware, indicator, printer or other peripheral equipment

Package includes: Factory-assembled scale module(s) including weighbridge, deck, lever system installed in scale frame, inboard transverse lever (for electronic conversion) is supplied standard unless outboard transverse lever is specified at time of order; manhole access provided through scale deck; standard paint system is a high-performance epoxy primer on all steel with a top coat of alkyd enamel applied to the exterior surface steel.

Package does not include: Foundation steel; approach coping angle; home run cable; concrete; indicator; printer; freight charges including material handling, shipping charges, transportation permits and fees, escort(s) charge, and insurance transportation fees.



APPROVALS



SURVIVOR
Durable performance
measured not in
years, but decades.

SPECIFICATIONS

FULL SCALE CAPACITY:

Standard 60,000lb to 200,000lb
Custom up to 400,000lb

CONCENTRATED LOAD CAPACITY (CLC):

Standard 50,000lb to 70,000lb
Custom up to 100,000lb

APPROVALS:

NTEP Certified per H-44, Class III, CC# 05-018

WARRANTY:

Five-year limited warranty on the weighbridge
Seven-year limited warranty on the lever system, excluding parts
One-year warranty on pivots, bearings, suspension, and mounting parts of the corner assemblies
Five-year parts warranty, including lightning protection (please refer to Warranty Statement on page HC-16)
Five-year lightning extended warranty (see page HC-16)

C&M SCALE
CALL FOR A QUOTE!
www.cmscale.com

Toll Free (800) 243-3721
Phone # (708) 771-0100
Fax # (708) 771-0195