

# DIGI® DS-470SS



## STANDARD FEATURES

- Stainless steel construction
- Indicator features three large fluorescent displays
- Full numeric keyboard
- Set target by weight or percentage variance – LO/OK/HI
- Selectable weight units (lb, oz, g, kg)
- Numeric tare entry or pushbutton entry
- Two standard interfaces, RS-232 for computers or setpoint I/F for PLC controllers

## APPROVALS



## SPECIFICATIONS

### DISPLAY:

Weight: Six-digits, 0.5in (13mm) character height, VFD  
 Min. and Max: Five-digits, 0.3in (7mm) character height

### WEIGHT SENSOR:

Load cell

### DISPLAY RESOLUTION:

1/3000, 1/6000, 1/7500, 1/12,000, 1/15,000 (selectable)

### INTERNAL RESOLUTION:

1/600,000

### POWER SOURCE:

100–120 VAC (50/60Hz)

### POWER CONSUMPTION:

13W

### APPROVALS:

NTEP Certified per H-44, Class III, 6000d, CC#02-110  
 Measurement Canada AM-5469

### WARRANTY:

Two-year limited warranty

## PART # DESCRIPTION CAPACITY

PART #	DESCRIPTION	CAPACITY	PLATFORM DIMENSIONS	EST. SHIP WEIGHT
74346	DS-470SS	6lb x 0.001 lb, 3kg x 0.001 kg, 3,000g x 1g, 96oz x 0.02	9in x 13in	32lb (14kg)
74347	DS-470SS	12lb x 0.002 lb, 6kg x 0.001 kg, 6,000g x 1g, 192oz x 0.05 oz	11in x 14in	34lb (15kg)
74348*	DS-470SS	30lb x 0.005 lb, 15kg x 0.002 kg, 15,000g x 2g, 480oz x 0.1 oz	11in x 14in	34lb (15kg)
74349	DS-470SS	60lb x 0.01 lb, 30kg x 0.005 kg, 30,000g x 5g, 960oz x 0.2 oz	11in x 14in	34lb (15kg)


\* Measurement Canada Approved

## OPTIONS/ACCESSORIES

73364..... Additional operation manual

## PLATFORM DIMENSIONS EST. SHIP WEIGHT

DIMENSIONS			
<b>A</b>	10.9in (262mm)	<b>B</b>	12.3in (312mm)
<b>C</b>	14in (355mm)	<b>D</b>	17.6in (445mm)
<b>E</b>	14.2in (360mm)	<b>F</b>	3.6in (91mm)
<b>G</b>	10.3in (262mm)		

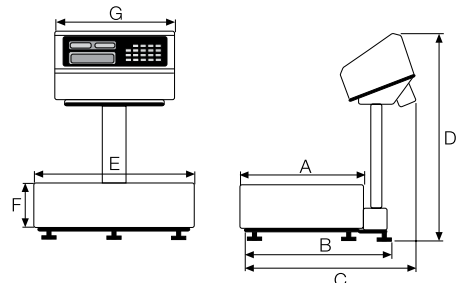

**C&M SCALE**  
 CALL FOR A QUOTE!  
[www.cmscale.com](http://www.cmscale.com)

Toll Free (800) 243-3721  
 Phone # (708) 771-0100  
 Fax # (708) 771-0195