

SJ-HS

This Stainless Steel Weighing Pan is extremely practical for all kinds of hygienic applications



SJ-1000HS SJ-2000HS SJ-5000HS SJ-12KHS



AND ...Clearly a Better Value
A&D WEIGHING

Food service, Stores, Post offices, Industries, Factories, Schools, Laboratories, Warehouses, Offices, Home use and a wide range of other diverse weighing applications are possible.

■ **Stainless steel weighing pan**

■ **High resolution**

(SJ-5000HS:1/2500, SJ-12KHS:1/2400, SJ-1000HS/2000HS: 1/2000)

■ **Fast stability time – Less than 1 second**



■ **Large wide LCD display (25mm height)**

■ **Durable body**

■ **Large weighing pan 230mm x 190mm**



■ **Full digital calibration function**

■ **Multiple weighing units – g, lb, oz and lb-oz**



■ **Battery operation with 4 x D size dry batteries**

■ **Simple and easy to change the batteries**

■ **Optional AC adapter**



■ **Automatic power OFF function**

■ **Spirit level and adjustable feet for accurate weighing**

■ **Status indication function – Battery, Stable, Zero and Net**




SJ-HS Specifications

| | | SJ-1000HS | SJ-2000HS | SJ-5000HS | SJ-12KHS |
|-----------------------|-------|--|-----------------|----------------|----------------|
| Capacity x Resolution | g | 1000g x 0.5g | 2000g x 1g | 5000g x 2g | 12kg x 0.005kg |
| | lb | 2.2lb x 0.001lb | 4.4lb x 0.002lb | 11lb x 0.005lb | 26lb x 0.01lb |
| | oz | 35oz x 0.02oz | 70oz x 0.05oz | 176oz x 0.1oz | 423oz x 0.2oz |
| | lb-oz | 2.2lb x 0.1 oz | 4.4lb x 0.1 oz | 11lb x 0.1oz | 26lb x 1 oz |
| Linearity | | ±1g | ±2g | ±5g | ±10g |
| Repeatability (S.D.) | | 1g | 2g | 5g | 10g |
| Span drift | | ±0.015% / °C TYP (5°C~35°C/ 41°F~95°F) | | | |
| Display | | Liquid Crystal Display , 25mm / 0.98 inches | | | |
| Operating temperature | | -10°C~-40°C / 14°F~ 104°F, less than 85% RH (No condensation) | | | |
| Display update | | Approx. 10 times per second | | | |
| Power | | 4 x R20P / LR20 / "D" size batteries or AC adapter | | | |
| Battery life | | Approx. 800 hours with alkaline cells at 20°C / 68°F | | | |
| Pan size | | 230 (W) x 190 (D) mm / 9.05 (W) x 7.48 (D) inches | | | |
| Dimensions | | 265 (W) x 250 (D) x 103 (H) mm / 10.4 (W) x 9.8 (D) x 4.1 (H) inches | | | |
| Weight | | Approx. 2.1kg / 4.6lb | | | |
| Calibration mass | | 1000g | 2000g | 5000g | 10kg |

Specifications subject to change for improvement without notice

External Dimensions (mm / inches)

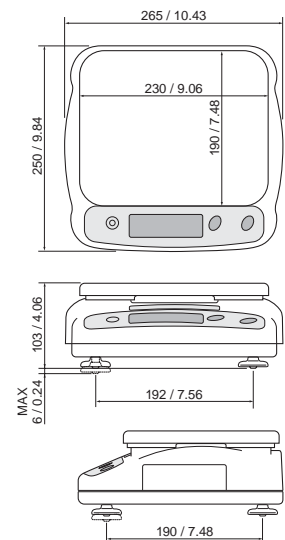

Accessories

| | | |
|------------------|------------|----------------------|
| AX-TB164B | AC adapter | AC230V "C" type plug |
| AX-TB173A | AC adapter | AC230V "BF" plug |
| AX-TB196 | AC adapter | AC100 "A" type plug |
| AX-TB202 | AC adapter | AC120 "A" type plug |

C&M SCALE

Website: www.cmscale.com
Email: support@cmscale.com

Toll Free: (800) 243-3721
In Chicago: (708) 771-0195
Fax: (708) 771-0195