

STAINLESS STEEL BENCH SCALES

Designed for **top performance and long-term accuracy.**



*EB-150 with
210 Indicator*

*EB-300 with
210 Indicator*



FEATURES:

- Stainless Steel Construction
- Large LED or LCD Display
- Push Button Tare
- Flexible Print Formats
- Pounds/Kilograms Conversion
- Gross, Tare, Net Conversion
- AC Power
- Auto Shutoff


WASHDOWN



STAINLESS STEEL BENCH SCALES

now with improved features
to answer your needs

EB-150 with
204 indicator

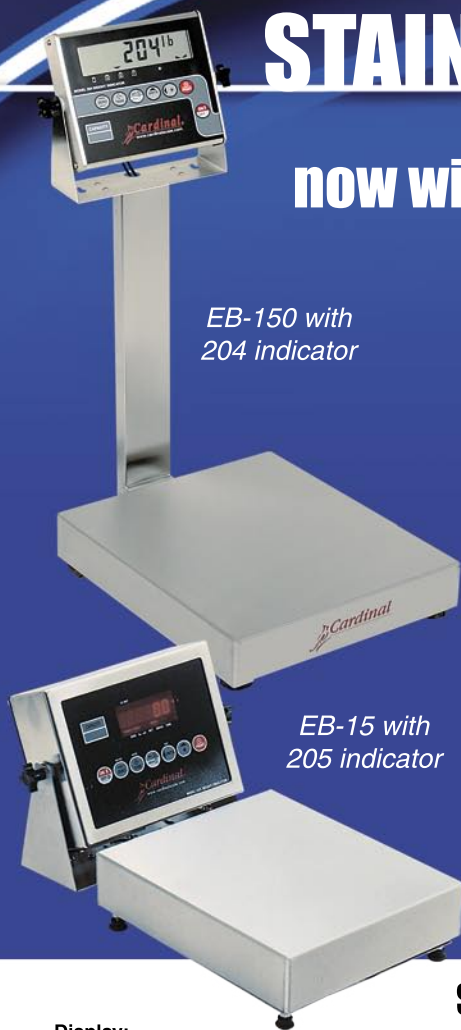

EB-15 with
205 indicator

Simplicity of design and rugged construction are the key features of Cardinal's stainless steel bench scale series. A simple frame and bridge design with lift-off platform simplifies cleanup by providing direct access to all of the components.

Select the size and capacity scale you need and match it up with the Cardinal indicator that best suits your application. The 204 is perfect for basic weighing. For harsher environments choose the 205 with NEMA 4X enclosure or the 210 which also features keypad tare, piece count and checkweighing.

Whatever your needs may be, select from Cardinal's complete line of stainless steel bench scales.



Optional commodity pan
with built-in drain.



Optional checkweigher
light bar for model 210.

SPECIFICATIONS

Display:

Model 204: 6-digit, 7-segment LCD, 25mm/1" high
Model 205/210: 6-digit, 7-segment LED, 14mm/0.6" high

Annunciators:

Model 204: Zero, gross, tare, net, low battery
Model 205: Zero, gross, tare, net, low battery, stable, lb, oz, kg, g, t, T
Model 210: All of the above plus PWC-1/under, PWC-2/accept, PWC-3/over

Enclosure:

Model 204: Stainless steel - 8"W x 6 5/8"H x 2 1/8"D
204mm x 168mm x 54mm
Model 205/210: NEMA 4X/IP66 - 9"W x 7"H x 2 3/4"D
229mm x 178mm x 70mm

Keyboard:

Model 204/205: 7 keys
Model 210: 22 keys

Units:

Pounds, kilograms, ounces, grams, or pounds/kilograms

Sample Rate:

1 - 50 samples per second, selectable

Auto Zero Range:

0.5 or 1 to 9 graduations

Resolution:

1 part in 100,000 displayed
1 part in 1,000,000 internal

Power:

90 to 260 VAC, 50 or 60 Hz

Temperature Range:

-10°C to 40°C/14°F to 104°F

I/O:

1 bidirectional RS232 (20mA)
1 output only RS232 (20mA)

MODEL	CAPACITY	PLATFORM SIZE
EB-15-204 EB-15-205 EB-15-210 EB-15-LPAN	15 lb x 0.005 lb / 6 kg x 0.002 kg	10" x 12" / 250 x 300 mm
EB-30-204 EB-30-205 EB-30-210 EB-30-LPAN	30 lb x 0.01 lb / 15 kg x 0.005 kg	10" x 12" / 250 x 300 mm
EB-60-204 EB-60-205 EB-60-210 EB-60-LPAN	60 lb x 0.02 lb / 30 kg x 0.01 kg	14" x 16" / 350 x 400 mm
EB-150-204 EB-150-205 EB-150-210 EB-150-LPAN	150 lb x 0.05 lb / 60 kg x 0.02 kg	14" x 16" / 350 x 400 mm
EB-300-204 EB-300-205 EB-300-210 EB-300-LPAN	300 lb x 0.1 lb / 150kg x 0.05 kg	20" x 24" / 500 x 600 mm

Cardinal Scale reserves the right to improve, enhance, or modify features and specifications without prior notice.



Cert. of Conf.
03-031

C&M SCALE
Website: www.cmscale.com
Email: support@cmscale.com

Toll Free: (800) 243-3721
In Chicago: (708) 771-0195
Fax: (708) 771-0195