

# Intercomp CS™ 1500



## STANDARD FEATURES

- Digital calibration
- Auto shut-off
- NEMA 4 cast aluminum case
- 0.8in LED digital readout
- Recessed push-button switch
- Powered by eight D cell batteries
- Infrared remote control
- NTEP on all capacities

## APPROVALS



## SPECIFICATIONS

### RESOLUTION:

20 bit A/D delivers more than 1 million internal counts

### CONTROLS:

Zero, lb/kg, On, Off, Tare, Print, Mode and Set

### DISPLAY:

0.8in (20mm) 5 1/2in LED

### INDICATORS:

lb/kg, Gross, Net, Total, and Peak Hold

### POWER:

(Batteries are not included) eight D size disposable alkaline dry cells or rechargeable nickel-cadmium cells. Battery life up to 100 hours continuous use.

### ENCLOSURE:

NEMA 4 cast aluminum case

### HOOK OR EYE:

Crosby-Laughlin or equivalent

### APPROVALS:

NTEP Certified per H-44, Class III, 3000d; Class III, 5000d, CC# 97-135A4 CE

### AUTO SHUT-OFF:

Low battery, or after five minutes without use

### ACCURACY:

±0.1% of reading

### TEMPERATURE:

Operating -4°F to 140°F (-20°C to 60°C)

### NOMINAL OVERLOAD:


200% of capacity

### MAXIMUM OVERLOAD:

500% of capacity

### WARRANTY:

One-year limited warranty

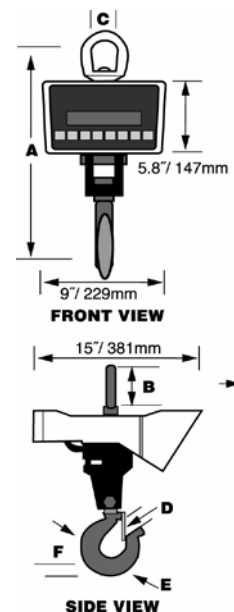

## DIMENSIONS

Part#	Capacity	Graduation	A	B	C	D	E	F	Weight
82447	300lb (150kg)	0.1 lb (0.05kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
82448	500lb (250kg)	0.2lb (0.1kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43647	1000lb (500kg)	0.5lb (0.2kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43648	2,000lb (1,000kg)	1lb (0.5kg)	11.5in (292mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43649	5000lb (2,500kg)	2lb (1kg)	19in (482mm)	2.88in (73mm)	2.25in (57mm)	1.69in (43mm)	2.5in (64mm)	1.82in (46mm)	38lb (17kg)
43650	10,000lb (5,000kg)	5lb (2kg)	19in (482mm)	2.88in (73mm)	2.25in (57mm)	1.69in (43mm)	2.5in (64mm)	1.82in (46mm)	38lb (17kg)
43651	20,000lb (10,000kg)	10lb (5kg)	23in (584mm)	3.5in (90kg)	3.12in (80mm)	2.41in (62mm)	3.25in (83mm)	2.6in (66mm)	45lb (20kg)

**C&M SCALE**  
 CALL FOR A QUOTE!  
[www.cmscale.com](http://www.cmscale.com)

Toll Free (800) 243-3721  
 Phone # (708) 771-0100  
 Fax # (708) 771-0195

<b>PART #</b>	<b>DESCRIPTION</b>	<b>EST. SHIP WEIGHT</b>
<b>CS1500 (batteries not included):</b>		
82447*	CS1500, 300lb (150kg) x 0.1lb (0.05kg)	22lb
82448*	CS1500, 500lb (250kg) x 0.2lb (0.1kg)	22lb
43647*	CS1500, 1000lb (500kg) x 0.5lb (0.2kg)	22lb
43648*	CS1500, 2000lb (1000kg) x 1lb (0.5kg)	22lb
43649*	CS1500, 5000lb (2500kg) x 2lb (1kg)	38lb
43650*	CS1500, 10,000lb (5000kg) x 5lb (2kg)	38lb
43651*	CS1500, 20,000lb (10000kg) x 10lb (5kg)	45lb

**OPTIONS/ACCESSORIES**

43939	RS-232 serial output	
43940	120/220V external charger (batteries included) for qty 2x4 D-Nicad/NiMH	
97443	Battery pack, qty 1x4 D-size-Nicad (spare)	
97445	Battery pack, qty 2x4 D-size-Nicad	

**C&M SCALE**  
 CALL FOR A QUOTE!  
[www.cmscale.com](http://www.cmscale.com)

Toll Free (800) 243-3721  
 Phone # (708) 771-0100  
 Fax # (708) 771-0195