


RoughDeck® SS

Stainless Steel Low-Profile Floor Scale

STANDARD FEATURES

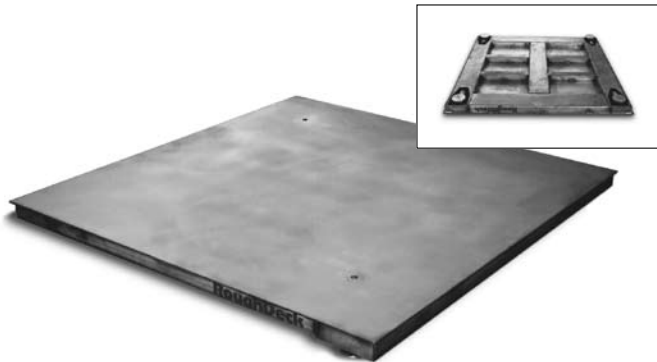

- Rugged non-corrosive design
- 304 stainless steel construction
- Rigid stainless steel channel frame
- Four stainless steel NTEP Certified shear beam load cells
- 20ft of SURVIVOR® EL147HE hostile environment load cell cable
- TuffSeal® JB4SS stainless steel, NEMA 4x j-box with signal trim card
- Smooth stainless steel deck
- Four adjustable stainless steel SUREFOOT™ support feet
- Threaded eyebolt holes for easy lifting
- Five-year limited warranty



The load cells are recessed within the channel and protected on all sides. SUREFOOT supports provide a superior load introduction surface, reducing extraneous forces which might affect scale accuracy



Unique side-entry junction box provides easy access

APPROVALS



Measurement
Canada
Approved



SPECIFICATIONS

APPROVALS:

NTEP Certified, CC #92-001A9
Class III 5000d
Measurement Canada Approved
AM-4827
HCSS Series

END LOAD CAPACITY:

200% full scale at 1,000 lbs
100% full scale at 2,000 lbs and 5,000 lbs
80% full scale at 10,000 lbs

CABLE LENGTH:

20ft (6.1 m)
(for connecting j-box to indicator)

WARRANTY:

Five-year limited warranty

BASES

| PART # | SIZE (W x L x H) | CAPACITY | EST. SHIP WEIGHT |
|--------|-----------------------|--------------------|------------------|
| 18663† | 2.5ft x 2.5ft x 3.5in | 2,000lb (1,000kg) | 173lb |
| 46239† | 3ft x 3ft x 3.5in | 1,000lb (500kg) | 232lb |
| 18664† | 3ft x 3ft x 3.5in | 2,000lb (1,000kg) | 232lb |
| 46241 | 4ft x 4ft x 3.5in | 1,000lb (500kg) | 375lb |
| 18665 | 4ft x 4ft x 3.5in | 5,000lb (2,500kg) | 375lb |
| 18666 | 4ft x 4ft x 3.5in | 10,000lb (5,000kg) | 490lb |
| 18667 | 4ft x 5ft x 3.5in | 5,000lb (2,500kg) | 437lb |
| 18668 | 4ft x 5ft x 3.5in | 10,000lb (5,000kg) | 567lb |
| 18671 | 5ft x 5ft x 3.5in | 5,000lb (2,500kg) | 541lb |
| 18672 | 5ft x 5ft x 3.5in | 10,000lb (5,000kg) | 696lb |
| 18676 | 5ft x 7ft x 3.5in | 10,000lb (5,000kg) | 929lb |

† Not recommended for use with pallet jacks

Note: All capacities are Canada approved

C&M SCALE
CALL FOR A QUOTE!
www.cmscale.com

Toll Free (800) 243-3721
Phone # (708) 771-0100
Fax # (708) 771-0195

| PART # | SIZE (W x L x H) | CAPACITY | EST. SHIP WEIGHT |
|---------------|-----------------------------|----------------------|-----------------------------|
| 18663† | 2.5 ft x 2.5 ft x 3.5 in | 2,000 lb (1,000 kg) | 173 lb |
| 46239**† | 3 ft x 3 ft x 3.5 in | 1,000 lb (500 kg) | 232 lb |
| 18664† | 3 ft x 3 ft x 3.5 in | 2,000 lb (1,000 kg) | 232 lb |
| 46241** | 4 ft x 4 ft x 3.5 in | 1,000 lb (500 kg) | 375 lb |
| 18665 | 4 ft x 4 ft x 3.5 in | 5,000 lb (2,500 kg) | 375 lb |
| 18666 | 4 ft x 4 ft x 3.5 in | 10,000 lb (5,000 kg) | 490 lb |
| 18667 | 4 ft x 5 ft x 3.5 in | 5,000 lb (2,500 kg) | 437 lb |
| 18668 | 4 ft x 5 ft x 3.5 in | 10,000 lb (5,000 kg) | 567 lb |
| 18671 | 5 ft x 5 ft x 3.5 in | 5,000 lb (2,500 kg) | 541 lb |
| 18672 | 5 ft x 5 ft x 3.5 in | 10,000 lb (5,000 kg) | 696 lb |
| 18676 | 5 ft x 7 ft x 3.5 in | 10,000 lb (5,000 kg) | 929 lb |

OPTIONS/ACCESSORIES

| | | | |
|-------|-------------------------------------------------------------------|--|--|
| 18778 | Floor anchor plates, stainless steel (set of two) | | |
| N/A | Four drilled deck holes for scale height adjustment | | |
| 28740 | RoughDeck floor stand for indicator, 36.3in high, stainless steel | | |
| 16960 | Additional operating manual | | |
| N/A | Stainless steel diamond treadplate safety deck | | |

* Load cell and junction box substitution.

† Not recommended for use with pallet jacks

** Measurement Canada Approved

Access ramps, pit frames, bumper guards and portability frames available. See pages F-39 thru F-48

C&M SCALE
 CALL FOR A QUOTE!
www.cmscale.com

Toll Free (800) 243-3721
 Phone # (708) 771-0100
 Fax # (708) 771-0195