


Pegasus X

Platform Scale

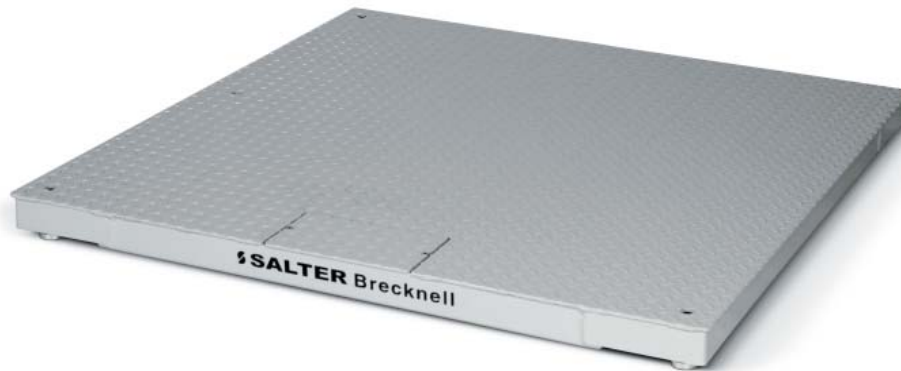

- **Rugged Construction**– Up to 0.25" (6 mm) thick top plate with heavy duty welded channel support as used on the DCSB
- **Low Profile**– 3.1 inches high using 1.75" adjustable leveling feet
- **Finish**– Powder coat paint
- **Versatile**– Pit mounted or free standing
- **Loadcells**– Four unapproved alloy tool steel potted loadcells
- **Available in mild steel construction**

Pegasus Floor Scales Platform Scale

J-Box Access– Top access for easy installation and service

Leveling Feet– Four top access holes for a quick installation

Threaded Eye Bolts– Two threaded top access eye-bolt holes for easy mobility and pit service

Corner Protection– Closed corners to prevent damage to leveling feet while installing the scale

Capacities & Resolution

Capacity	Model	Dimension-in.	Dimension-cm
5,000 x 1 lb (2500 x .5 kg)	DCSB4848-05	48 x 48 x 3.1	122 x 122 x 7.9
	DCSB6048-05	60 x 48 x 3.1	152 x 122 x 7.9
	DCSB7248-05	72 x 48 x 3.1	183 x 122 x 7.9
	DCSB6060-05	60 x 60 x 3.1	152 x 152 x 7.9

All capacities and resolutions shown above are based on 5000d

General Floor Scale Specifications

Platform Material

Construction: Mild steel
.25 inch deck with safety tread,
10K (4' x 6'; 4' x 5'; 5' x 5')

Finish– Powder coat paint

J-Box Construction– ABS plastic

Loadcell Material– Alloy tool steel potted

Loadcell Rated Output– 3 mv/V

Loadcell Output Resistance– 350 ohm

Overload Protection– 150% of rated capacity

End Loading– 100% of rated capacity

Temperature– 14° F to 104° F (-10° C to 40° C)

Rugged Construction



Wide channel design for superior durability

Options

Ramps– Up to four ramps can be used with the Pegasus family

Indicators– The Pegasus can be used with a variety of electronic indicators

Pit Frames– Mild steel frames

Indicator Stand– 48" high, mild steel, powder coat painted, for the Salter Brecknell 200E or 200ES indicator. Includes stand, mounting hardware and floor mount baseplate. Can also be supplied with a free standing stand for use with the SBI 100 and SBI 140 indicators.

C&M SCALE
Website: www.cmscale.com
Email: support@cmscale.com

Toll Free: (800) 243-3721
In Chicago: (708) 771-0195
Fax: (708) 771-0195