

# 120

DIGITAL WEIGHT INDICATOR



**RICE LAKE**<sup>™</sup>  
WEIGHING SYSTEMS

Commitment Beyond Measurement<sup>®</sup>

[www.ricelake.com](http://www.ricelake.com)

# 120 DIGITAL WEIGHT INDICATOR



## Where Economy and Performance Meet

With the 120, there is no need to sacrifice quality for price. This digital weight indicator is designed to be a reliable, cost-effective solution for material handling or shipping and receiving applications.


The 120 drives up to four 350Ω load cells. And three-stage digital filtering provides stable, accurate weight data. The 120's five-button tactile front panel and easy-to-read LED display help to make scale operations effortless. Two independent communication ports provide full EDP and print ticket programmability.

## A Combined Effort

Purchase the 120 alone, or buy it with one of our quality bench or floor scales. We've paired the 120 with a bench scale as an economic bundled option. The 17" x 21" stainless steel platform is an ideal size for a range of applications.



Additionally, we offer a floor scale and indicator package that combines the 120 with the Summit 3000 Floor Scale. They arrive at your location corner trimmed and calibrated for 5000 divisions.

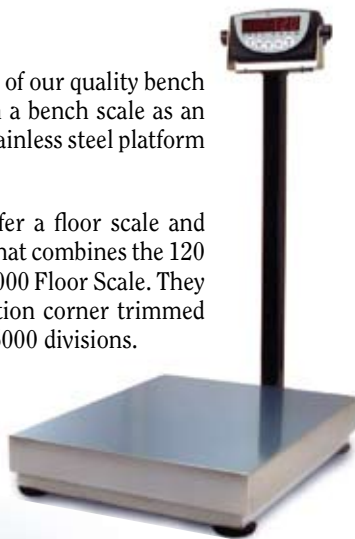

Program a ticket format with the 120. Use up to 180 characters.

## Standard Features

- Large .8" (20 mm) Red Light Emitting Diode (LED) display
- 30 updates per second selectable
- Power for four 350Ω load cells
- Primary/secondary unit configuration: lb, kg, ounces, grams
- 5-button operation
- Two independent communication ports: (1) full duplex, (1) unidirectional or active 20 mA current loop
- Standardized EDP command sets
- Programmable ticket format for up to 180-character printout
- Full front-panel digital calibration and configuration
- Tilt stand
- Three-stage digital filtering
- Consecutive transaction numbering
- Time and date (volatile)

## Options/Accessories

- External disconnect
- Load cell plug
- Revolution III Scale Software
- Additional operating manual

## Specifications

<b>Line Voltages:</b>	115 or 230 VAC with AC adapter
<b>Power Consumption:</b>	70 mA @ 115 VAC (8W) 35 mA @ 230 VAC (8W)
<b>Excitation Voltage:</b>	5 ± 0.5 VDC, 4 x 350Ω load cells
<b>Analog Signal Input Range:</b>	0.6 mV/V - 3.0 mV/V
<b>Analog Signal Sensitivity:</b>	0.3 μV/graduation minimum, 1.5 μV/grad recommended
<b>Resolution:</b>	Internal resolution: 1,000,000 internal graduations
<b>Display Resolution:</b>	100,000 displayed graduations
<b>Measurement Rate:</b>	30, 15, 7, 3 per second
<b>System Linearity:</b>	Within 0.01% of full scale
<b>Circuit Protection:</b>	RFI, EMI, ESD protected
<b>Serial Output:</b>	7 or 8 data bits; even, odd or no parity
<b>Printer Port:</b>	Output-only RS-232 or active 20 mA current loop
<b>EDP Ports:</b>	Full duplex RS-232 (300-38400 bps)
<b>Display:</b>	0.8" (20 mm), 6-digit Super Red Light Emitting Diode (LED) display, 7-segment, number digits
<b>Status Annunciators:</b>	Designators for: center of zero, stand still, gross, net, lb, kg, oz, g
<b>Keyboard:</b>	5-key flat membrane panel, tactile feel
<b>Operating Temperature:</b>	-10°C to 40°C/14°F to 104°F (legal) -10°C to 50°C/14°F to 122°F (industrial)
<b>Warranty:</b>	1-year limited warranty

## Approvals



Measurement  
Canada  
Approved



**C&M SCALE**  
Website: [www.cmscale.com](http://www.cmscale.com)  
Email: [support@cmscale.com](mailto:support@cmscale.com)

Toll Free: (800) 243-3721  
In Chicago: (708) 771-0195  
Fax: (708) 771-0195